


ROTEX TAKO GENERATOR TEKNİK DETAYI

Specifications of Tacho Generator				
Specification	Tolerance	Unit		
Voltage at 1000 r.p.m.	± 3 %	Volt	20	60
Nominal Current		mA	10	5
Maximum Current Admitted		mA	200	70
Armature Resistance at 20 °C	± 10 %	ohm	75	400
Maximum Speed		rpm	6000	5000
Electrical Time Constant	± 10 %	ms		1,3
Peak to peak ripple		%		≤ 1
Linearity		%		≤ 0,20
Reversibility		%		± 0,15
EMF Variation with Temperature		% / C		- 0,015
Insulation Class				B
Number of Poles				2
Number of Slots				33
Number of Segments				33
Excitation			AlNiCo Perm. Magnet	
Protection Class			IP 54	
Models			SDB / FDB	SDB / FDB
Weight - SDB			1,35	1,35
Weight - FDB			2,00	2,00
Mounting	SDB : Hollow Shaft Mounting FDB : Falnge and Shaft Mounting			

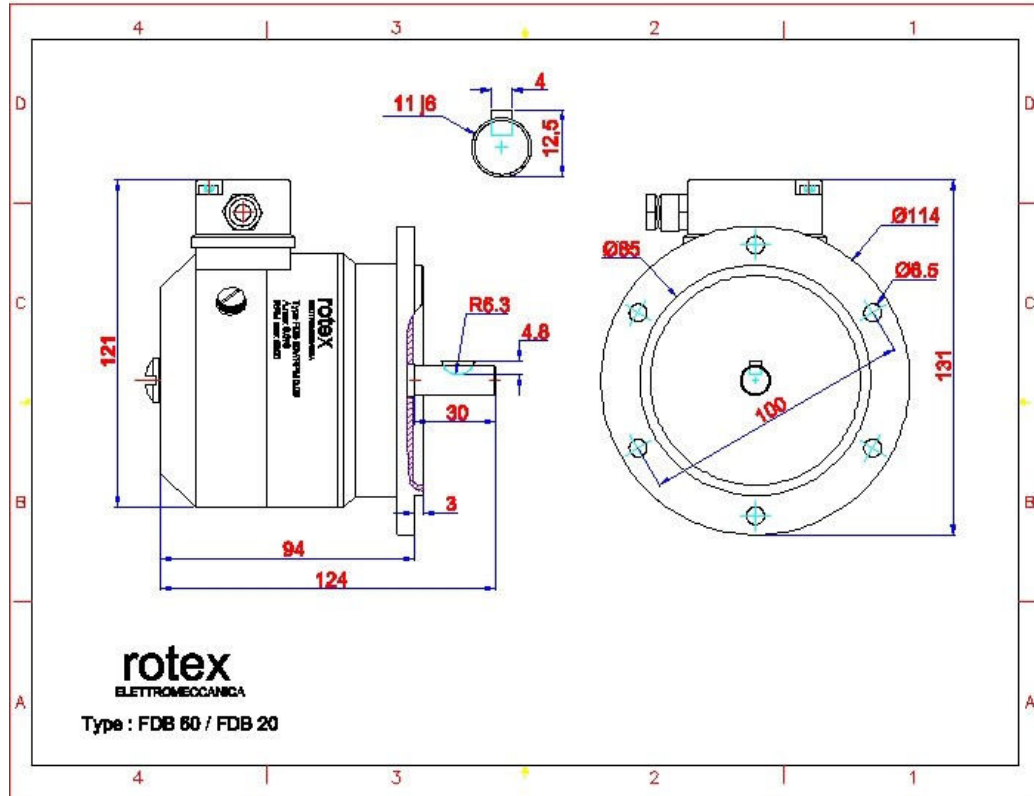

Sense Elektronik Otomasyon

Okçu Musa Cd. Menevşe İş Hanı No:22/198 Kat:3 Karaköy/İstanbul T:0212 237 78 14 F:0212 237 78 04